


# Rubber Gasket Dimension & Tolerance

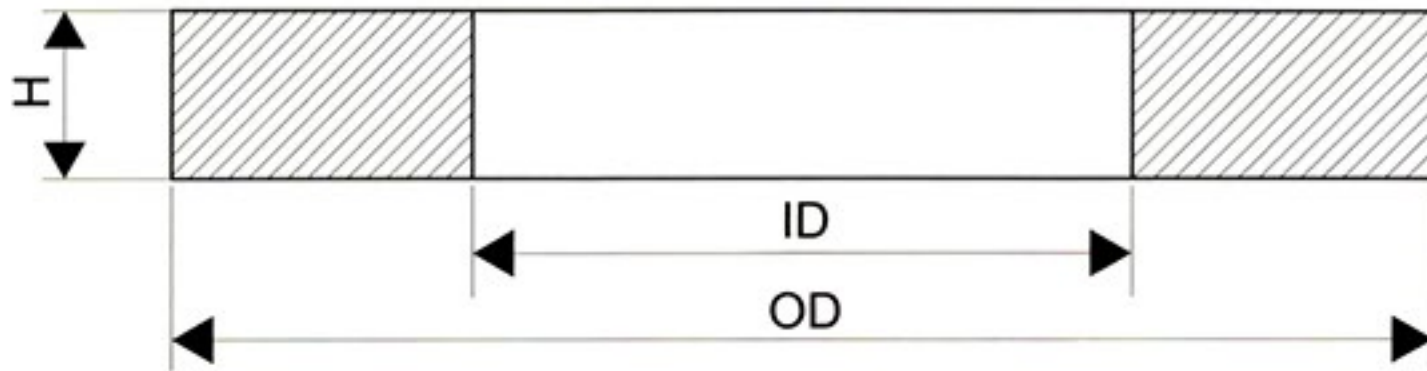

ID(mm)		Tolerance( ± )		W ( mm )		Tolerance( ± )	
4	— 14.00		0.13	0	— 1.68		0.15
14.01	— 15.60		0.18	1.69	— 2.51		0.15
15.61	— 25.12		0.23	2.52	— 3.40		0.15
25.13	— 29.78		0.25	3.41	— 5.16		0.15
29.79	— 34.65		0.28	5.17	— 6.73		0.15
34.66	— 44.17		0.33	6.74	— ...		0.20
44.18	— 50.52		0.38				
50.53	— 66.40		0.46				
66.41	— 75.92		0.51				
75.93	— 94.97		0.61				
94.98	— 107.67		0.69				
107.68	— 126.72		0.76				
126.73	— 133.07		0.94				
133.08	— 158.42		0.89				
158.43	— 183.82		1.02				
183.83	— 209.22		1.14				
209.23	— 234.62		1.27				
234.63	— 278.99		1.40				
279.00	— 405.26		1.65				
405.27	— 430.66		1.91				
430.67	— 456.07		2.03				
458.08	— ...		0.5%				
				H ( mm )		Tolerance( ± )	
				0	— 1.68		0.08
				1.69	— 2.51		0.10
				2.52	— 3.40		0.10
				3.41	— 5.16		0.10
				5.17	— 6.73		0.10
				6.74	— ...		0.15